


Application Examples

MARLIN 3D LASER SERIES



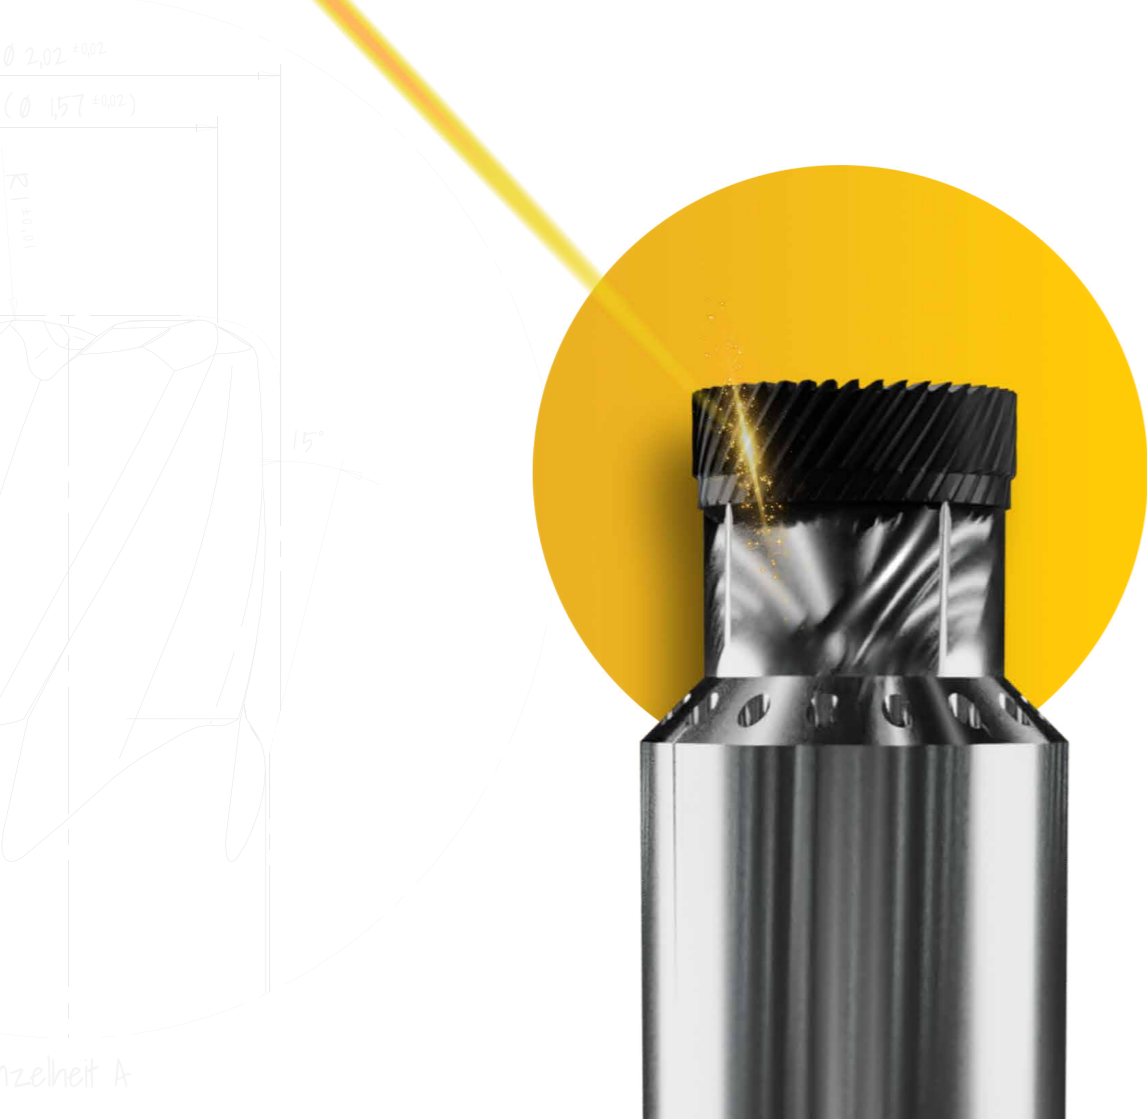

MARLIN 3D LASER SERIES


MACHINING OF ULTRA-HARD MATERIALS

ZECHA presents the new MARLIN 3D LASER SERIES, an innovative Solution for machining ceramics and solid carbide.

The latest laser technology offers decisive advantages and flexibility to produce highly precise, complex and detailed 3D tool geometries. This novel series revolutionizes tool design and improves efficiency.

PCD and CVD blanks or cutting materials made entirely of PCD or CVD are used for ball nose and torus mills and drilling tools.

On the following pages you will find some examples of the tools in practice. They show the tools used and the milling strategies employed in each step.

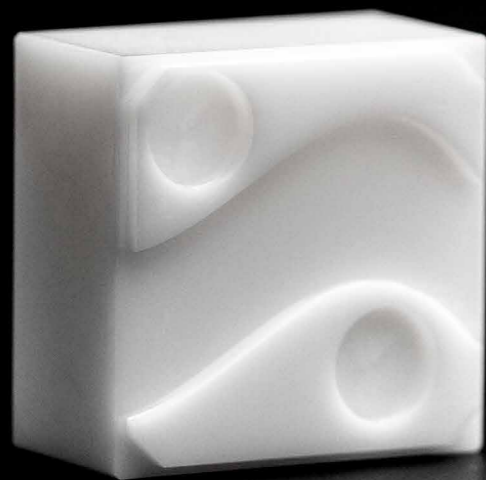

T28 COMPONENT MADE OF FULLY SINTERED ZIRCONIUM


This example, which was milled from fully sintered zirconium dioxide, shows how easily the 28-tooth tool cuts through the ceramic and the perfect surface it leaves behind.

966P.T28.0400.005.050




01. SURFACE-MILLING COMPONENT TOP

Tool: 966P.T28.0400.005.050
RPM: 19,496
Feedrate: 437 mm/min
Offset: 0.000 mm
ae: 2.000 mm
ap: 0.050 mm
Runtime: 00:01:00 h

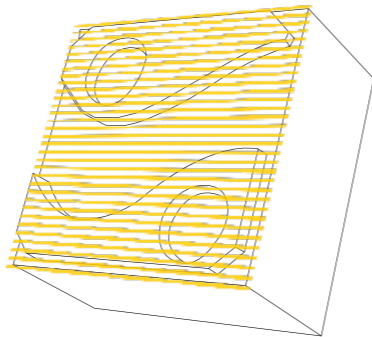


02. MILLING OUTER CONTOUR

Tool: 966P.T28.0400.005.050
RPM: 19,496
Feedrate: 437 mm/min
Offset: 0.000 mm
ae: 0.100 mm
ap: 1.000 mm
Runtime: 00:04:10 h

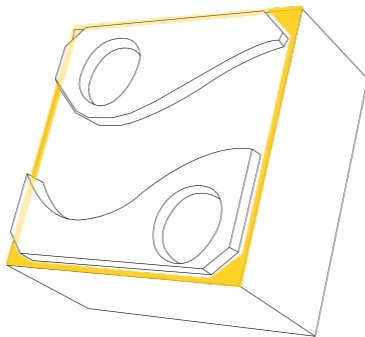


03. DRILLING HOLES


Tool: 966P.T28.0400.005.050
RPM: 19,496
Feedrate: 437 mm/min
Offset: 0.000 mm
ae: Full-Gauge
ap: 0.030 mm
Runtime: 00:01:40 h

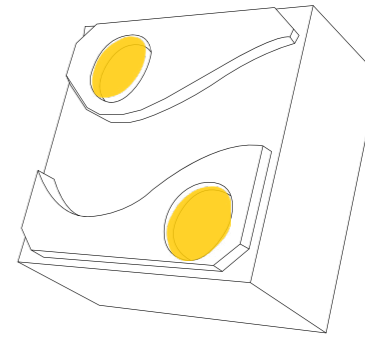

04. TROCHOIDAL WAVE GROOVE

Tool: 966P.T28.0400.005.050
RPM: 19,496
Feedrate: 437 mm/min
Offset: 0.000 mm
ae: 0.100 mm
ap: 1.000 mm
Runtime: 00:11:50 h

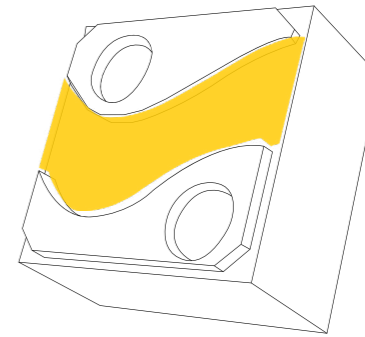

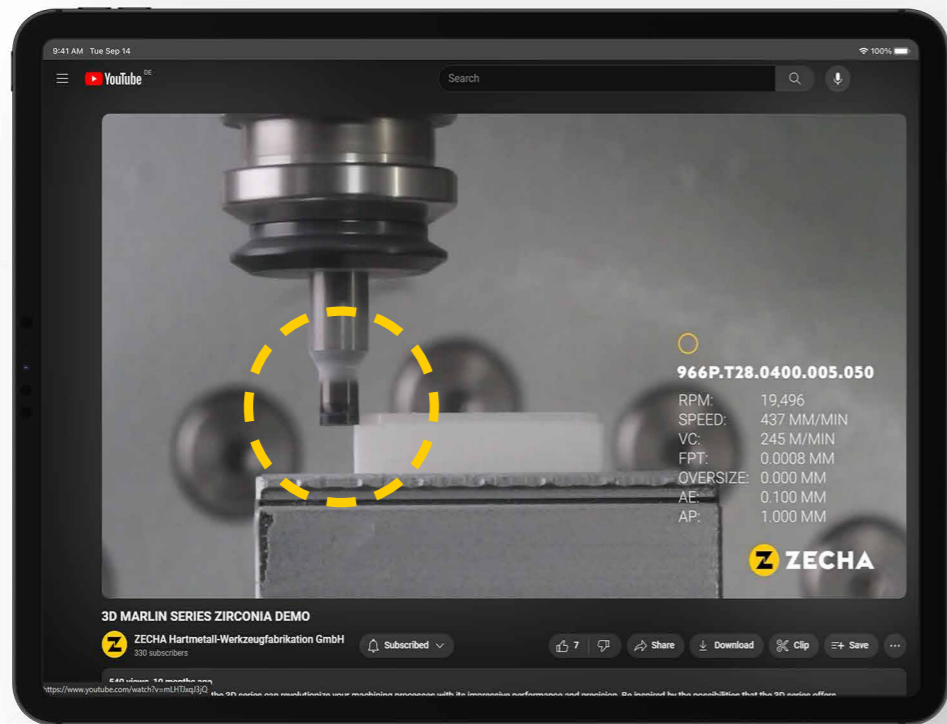

SEE IT IN ACTION

Filmed in ZECHA's in-house test facilities on the KERN Micro-HD, you can see how the tools effortlessly cut through fully sintered zirconium oxide using the previously listed feeds and speeds.

Scan the QR code and you will be taken directly to the video on ZECHA's YouTube page.





FLOW CELL MADE OF FULLY SINTERED ZIRCONIUM


This component was produced in collaboration with Röders, OPEN MIND, and the Deggendorf Institute of Technology using a variety of tools from the 3D MARLIN SERIES, with grinding pins, end mills and drills all performing equally impressively in the production of this interesting piece.

9911.0400.050.160M



01. ROUGHING OUTER CONTOUR

Tool: 9911.0400.050.160M
RPM: 38,000
Feedrate: 1000 mm/min
Offset: 0.100 mm
ae: 0.050 mm
ap: 5.500 mm
Runtime: 00:13:00 h

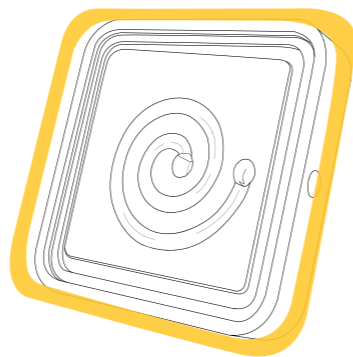


966P.T28.0400.005.050




02. SURFACE-MILLING OUTER STEP

Tool: 966P.T28.0400.005.050
RPM: 14,324
Feedrate: 401 mm/min
Offset: 0.000 mm
ae: 0.030 mm
ap: 0.100 mm
Runtime: 00:01:15 h



03. FINISHING OUTER CONTOUR

Tool: 966P.T28.0400.005.050
RPM: 14,324
Feedrate: 401 mm/min
Offset: 0.000 mm
ae: 0.050 mm
ap: 10.000 mm
Runtime: 00:01:00 h

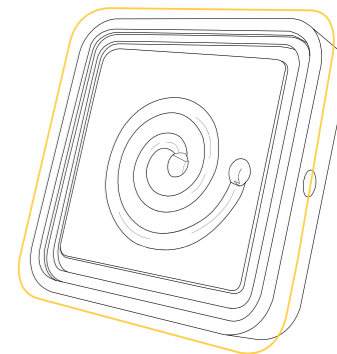


966P.T28.0400.005.050




04. ROUGHING POCKET

Tool: 966P.T28.0400.005.050
RPM: 14,324
Feedrate: 401 mm/min
Offset: 0.020 mm
ae: 0.050 mm
ap: 1.000 mm
Runtime: 00:33:00 h




05. FINISHING POCKET SURFACE

Tool: 966P.T28.0400.005.050
RPM: 14,324
Feedrate: 401 mm/min
Offset: 0.000 mm
ae: 0.020 mm
ap: 0.020 mm
Runtime: 00:09:00 h



06. FINISHING POCKET CONTOUR

Tool: 966P.T28.0400.005.050
RPM: 14,324
Feedrate: 401 mm/min
Offset: 0.000 mm
ae: 0.020 mm
ap: 10.000 mm
Runtime: 00:00:20 h




971P.0200.05



07. DRILL HOLES TOP AND SIDES

Tool: 971P.0200.05
RPM: 5,000
Feedrate: 15 mm/min
Fz drilling: 0.003 mm
Chip break: from 5 mm with 3 mm
Runtime: 00:02:30 h




962P.T5.0100.010.008




08. ROUGHING SEALING GROOVE

Tool: 962P.T5.0100.010.008
RPM: 31,831
Feedrate: 255 mm/min
Offset: 0.000 mm
ae: 1.000 mm
ap: 0.020 mm
Runtime: 00:07:00 h



09. FINISHING SEALING GROOVE

Tool: 962P.T5.0100.010.008
RPM: 31,831
Feedrate: 450 mm/min
Offset: 0.002 mm
ae: 0.010 mm
ap: 0.500 mm
Runtime: 00:03:45 h



COMING SOON
962P.B6.0100.050.013




10. ROUGHING HELICAL GROOVE


Tool: 962P.B6.0100.050.013
RPM: 38,000
Feedrate: 480 mm/min
Offset: 0.020
ae: 0.100
ap: 0.050
Angle: 20°
Runtime: 00:04:45 h



11. FINISHING HELICAL GROOVE

Tool: 962P.B6.0100.050.013
RPM: 38,000
Feedrate: 480 mm/min
Offset: 0.000 mm
ae: 0.020 mm
ap: 0.020 mm
Angle: 20°
Runtime: 00:17:00 h



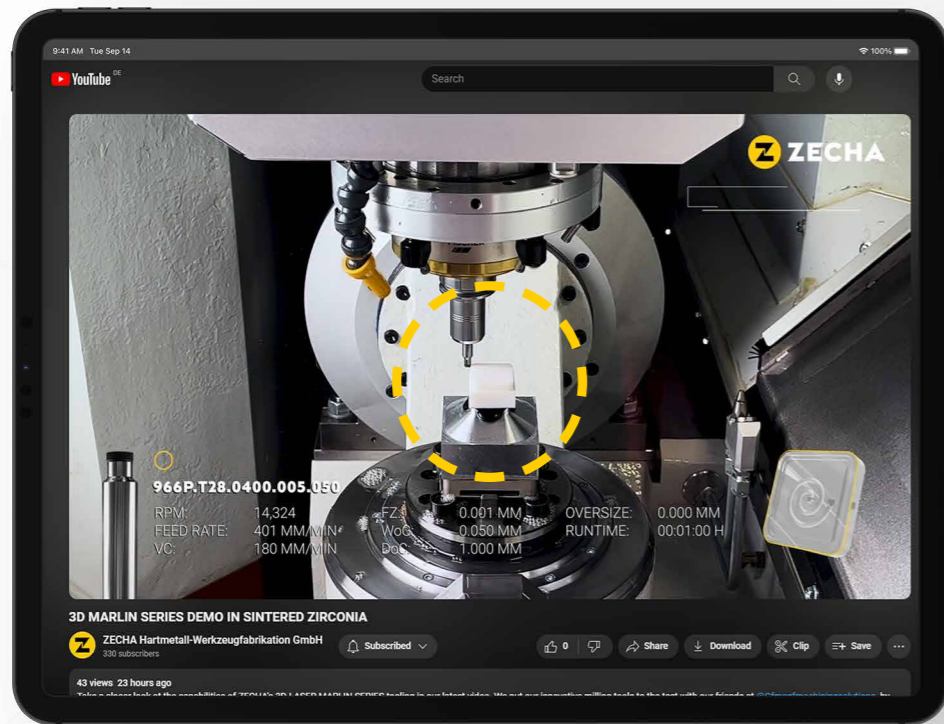


SEE IT IN ACTION

This component was produced for a seminar on milling zirconium dioxide with the help of our friends at THD Deggendorf.

Scan the QR code to see the technology in action...



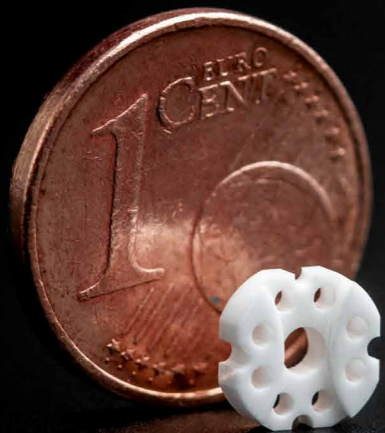

MIKROIMPLANT MADE FROM FULLY SINTERED ZIRCONIUM

This component is a microimplant made of fully sintered zirconium dioxide, which we produced in collaboration with YourTool Odonics GmbH in Austria, a high-end contract manufacturer.

The micro dimensions of this workpiece show that the 3D MARLIN SERIES offers the stability and precision required for such work, even at the micro level.




01. ROUGHING SURFACE AREA HELIX

Tool: 9910.0400.050.160M
RPM: 40000
Feedrate: 800 mm/min
Offset: 0.050 mm
ae: 0.030 mm
ap: Up to 3 mm
Coolant: Oil
Runtime: 00:05:00 h



02. DRILLING D2MM

Tool: 971P.0200.05
RPM: 4,800
Feedrate: 5 mm/min
Fz Drilling: 0.0008 mm
Drill depth: 2.500 mm
Coolant: Oil
Runtime: 00:01:00 h




971.0097



03. DRILLING D0,97MM

Tool: 971.0097
RPM: 9500 U/min
Feedrate: 8 mm/min
Fz Drilling: 0.001 mm
Drill depth: 2.200 mm
Coolant: Oil
Runtime: 00:02:00 h




966P.T21.0300.005.030



04. FINISHING SURFACE AREA HELIX

Tool: 966P.T21.0300.005.030
RPM: 19,000
Feedrate: 400 mm/min
Offset: 0.000 mm
ae: 0.100 mm
ap: 0.050 mm
Coolant: Oil
Runtime: 00:03:00 h

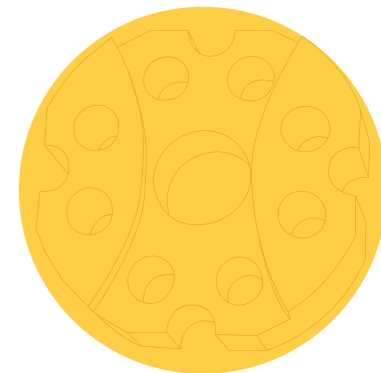




9910.0400.050.160M

05. ROUGHING OUTER CONTOUR

Tool: 9910.0400.050.160M
RPM: 40,000
Feedrate: 800 mm/min
ae : 0.030 mm
ap: 2.700 mm
Coolant: Oil
Runtime: 00:01:00 h




9910.0400.050.160M



06. ROUGHING LATERAL CHAMFERS

Tool: 9910.0400.050.160M
RPM: 40,000
RPM: 800 mm/min
ae: 0.030 mm
ap: 2.700 mm
Coolant: Oil
Runtime: 00:02:00 h




966P.T21.0300.005.030



07. FINISHING OUTER CONTOUR

Tool: 966P.T21.0300.005.030
RPM: 19,000
Feedrate: 400 mm/min
Offset: 0.000 mm
ae: 0.010 mm
ap: 0.700 mm
Coolant: Oil
Runtime: 00:06:00 h

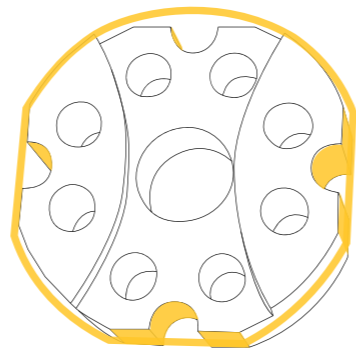


9910.0200.020.080M



08. ROUGHING TROCHOIDAL RECESS

Tool: 9910.0200.020.080M
RPM: 43,000
Feedrate: 500 mm/min
Offset: 0.050 mm
ae: 0.020 mm
ap: 0.500 mm
Coolant: Oil
Runtime: 00:02:00 h




962.T5.0150




09. FINISHING INNER SIDE STEP

Tool: 962.T5.0150
RPM: 38,000
Feedrate: 200 mm/min
Offset: 0.000 mm
ae: 0.050 mm
ap: 0.020 mm
Coolant: Oil
Runtime: 00:04:00 h



10. FINISHING INNER BASE STEP

Tool: 962.T5.0150
RPM: 38,000
Feedrate: 200 mm/min
Offset: 0.000 mm
ae: 0.050 mm
ap: 0.020 mm
Coolant: Oil
Runtime: 00:01:00 h





D1,4 CHAMFER TOOL 90°



II. FINISHING CHAMFER EDGES

Tool: D1,4 Chamfer Tool 90°
RPM: 15,000
Feedrate: 200 mm/min
Offset: 0.000 mm
ae: 0.050 mm
ap: 0.050 mm
Coolant: Oil
Runtime: 00:01:00 h



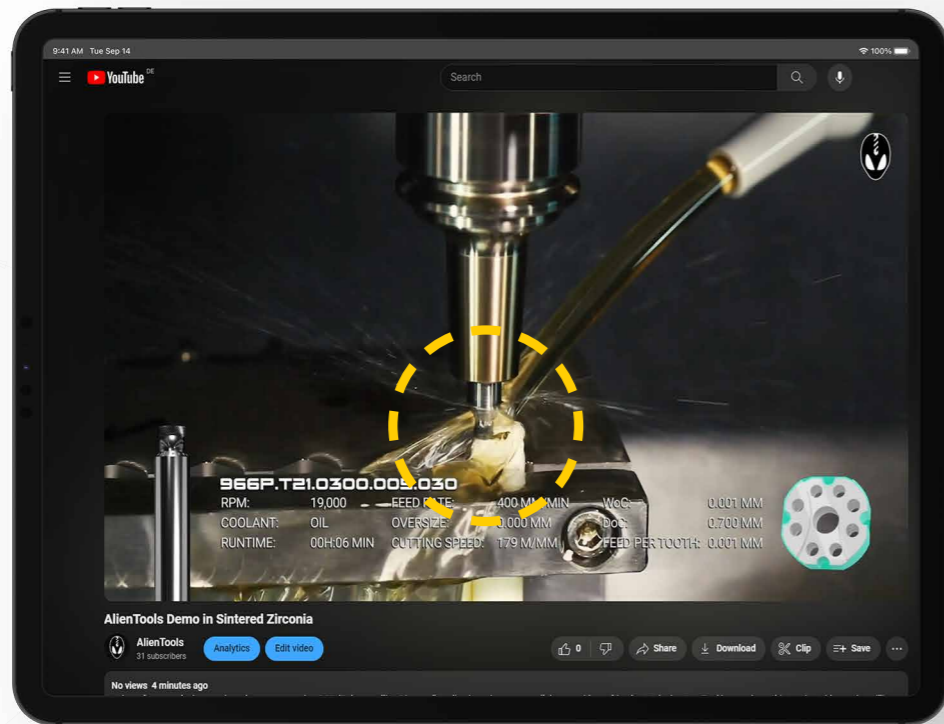

SEE IT IN ACTION

Curious to see what the milling strategies and tools look like in practice? Watch the milling of this piece on the YouTube channel of our 'subsidiary' AlienTools.

Simply scan the QR code with your mobile and you will be redirected to the video on YouTube.





DON'T MISS A THING

Scan the QR codes below to access ZECHA's various social media accounts where you can stay up to date on new tools, new videos, live events and much more.

Subscribe and stay up to date.



 @zechatools



 @zechatools



 @zechatools



 @zechatools



ZECHA Hartmetall-Werkzeugfabrikation GmbH
Benzstraße 2, D-75203 Königsbach-Stein
+49 7232 3022 0
www.zecha.de/en/, info@zecha.de



**Top-Innovator
2023**

STAND 04/2024 | 92414

Copyright by ZECHA Hartmetall-Werkzeugfabrikation GmbH.
Technische Änderungen unserer Produkte im Zuge der Weiterentwicklung behalten wir uns vor.